

TO ASSEMBLE:

Place main post into the hole provided on stool, making sure that the driving wheel stands square to the base. Put bush and wing-nut on threaded pin and tighten very securely.

Place head on post. Lining up pin and slot. Put washer and wing-nut on thread and tighten.

Put bobbin in place.


Place flyer on by screwing it onto axle.

Put arm through slot on back leg and screw linkage tightly onto threaded end of main axle, by turning the driving wheel. Click the pins into place, in trough provided. You may put a little grease in here.

Now place on driving belt, selecting the speed you prefer (see diagram);

Put brake on bobbin and spin.

NOTE: By releasing wing-nut and lifting or lowering head, the tension on driving belt can be altered. (It needs to be tighter for plying).

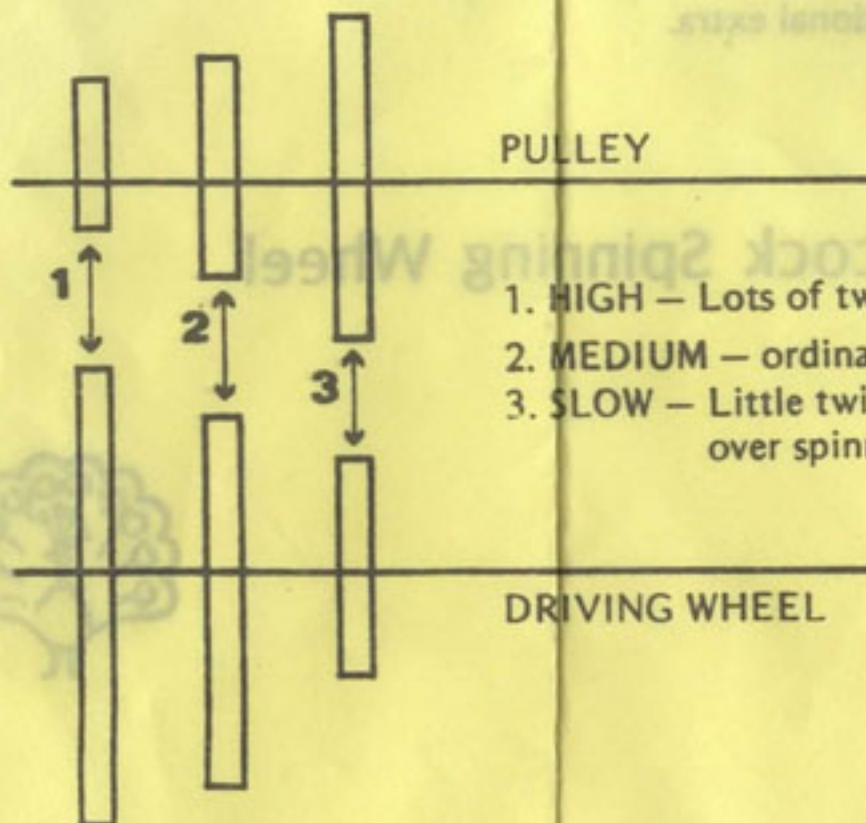

PULLEY

1. HIGH – Lots of twist
2. MEDIUM – ordinary spinning
3. SLOW – Little twist (if habitually over spinning use this speed.)

DRIVING WHEEL