


Grace Lazy Kate

To assemble your lazy kate:

- * Tap in the four steel pins and push the washers over them down to the base.
- * Place the centre post into the base and screw through the washer into the post.
- * Take the brake band of the tension peg around the grooves at the base of the bobbins.
- * Put the tension peg in its hole, passing it through the rubber band.
- * By twisting the tension peg equal pressure can be applied to the bobbins to prevent tangle or overrun when plying.
- * If no tension is required simply remove the brake band.
- * This lazy kate is best used raised on a table at or above orifice height set behind the spinner.



After Sales Service

Your wheel was fully assembled and thoroughly tested before despatch, so we have every confidence that in normal use with reasonable care and attention it will serve you well.


Spare parts, extra bobbins etc. are available on request.

If you should encounter any difficulties please don't hesitate to contact us.

Happy spinning!

MIKE & MAGGIE KEEVES

User's Manual for the **Little Grace Spedal**

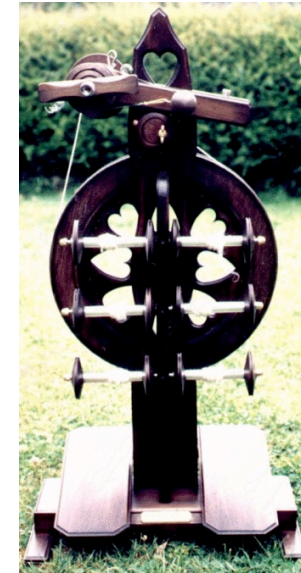

Handcrafted by
Mike & Maggie Keeves
The Grace Spinning Wheels
88 Valley, RD1 WAKEFIELD
Nelson, NEW ZEALAND

Phone/Fax: 64-3-541-8461
Email: mkeeves@clear.net.nz